




FLIR M300C

HIGH-PERFORMANCE MARINE VISIBLE CAMERA



Combining a high-performance visible marine camera with outstanding optical zoom capabilities, the M300C offers positive target identification for law enforcement, commercial, and recreational applications. Advanced gyro stabilization combats rough sea conditions and allows the M300C to continuously monitor targets or hazards over long distances. The M300C's advanced near-infrared sensor delivers exceptional low light performance for enhanced awareness after the sun goes down.

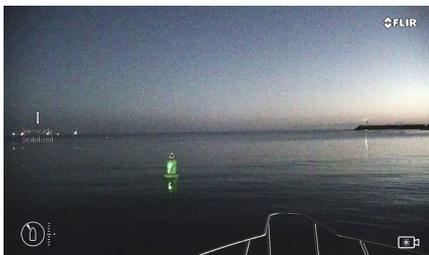

EXCEPTIONAL DAY & NIGHT VISION

- See at night with near-infrared low light mode
- Locate and identify distant targets with 30x optical zoom
- Intelligent non-water object detection with Marine Video Analytics (MVA)



A STEADY VIEW IN ROUGH SEAS

- Two-axis stabilization virtually eliminates the effects of pitch, heave, and yaw
- Integrated AHRS (Attitude Heading Reference Sensor) delivers superior stabilization



MFD READY

- Integrate M300C with multifunction chartplotter displays from Furuno, Garmin, Raymarine and Simrad/B&G
- ONVIF compliant for streamlined integration with a wide variety of video management systems

SPECIFICATIONS

M300C	
VISIBLE CAMERA	
Detector Type	1/2.8" CMOS
Resolution	Up to 1920 x 1080 @ 30fps
Minimum Illumination	Low Light Setting ON: 0.006 lux Low Light Setting OFF: 0.1 lux
Optical Zoom	30x
Digital-Zoom	12x
Focal Length	129 mm to 4.3 mm
Field of View	63.7° x 35.8° WFOV to 2.3° x 1.29° NFOV
SYSTEM SPECIFICATIONS	
Gyro Stabilized	Yes
Marine Video Analytics (MVA)	Yes
Pan/Tilt Adjustment Range	360° Continuous Pan, +/- 90° Tilt
Analog Video Output	NTSC/PAL User Settable
Analog Video Connector Types	BNC
Network Video Output	Two, Independent H.264/MJPEG Network Video Streams
HD-SDI Lossless Video Output	Yes
Power Requirements	12-24V DC
Power Consumption	41W nominal; 56W w/ heater
ONVIF	Profile S Conformance
ENVIRONMENTAL	
Operating Temperature Range	-13°F to +131°F (-25°C to +55°C)
Storage Temperature Range	-22°F to +158°F (-30°C to +70°C)
Automatic Window Defrost	Standard at Power-Up
Water Ingress	IPX6
Shock	15g vertical, 9g horizontal
Vibration	IEC60945
Lightning Protection	Near Strike at 2kV
Salt Mist	IEC60945
EMI	IEC60945
PHYSICAL	
Weight	Camera: 13.9lbs (6.3kg) Camera with Top-Down Riser: 14.9lbs (6.8kg)
Size	Camera: 8.7" (222mm) x 12.9" (328mm) Camera with Top-Down Riser: 10.0" (254mm) x 14.4" (366mm)

* Always check display manufacturer's website and technical documentation for the latest information regarding camera/display compatibility

USA
Teledyne FLIR Maritime US Inc
110 Lowell Road
Hudson, NH 03051
United States of America

EUROPE
Teledyne FLIR Maritime
Marine House, Cartwright Drive,
Fareham, PO15 5RJ
UK

WARRANTY

Teledyne FLIR's service commitment of outstanding warranty and technical support now offers you even more; by registering your system with FLIR at www.teledyneflir.com/productreg, the 2-Year Standard Limited Warranty is upgraded and replaced by the 3-Year Extended Limited Warranty for FREE.

For complete details on FLIR's industry-leading warranty please visit www.teledyneflir.com/maritime.

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice.
©2021 Teledyne FLIR LLC, Inc.

